



Dial Indicator, Lug Back 80mm, 0,01mm, Shockp., Coax. Rev. Count.

Item number: 3060S-19



Description


This is a standard, metric dial indicator. It offers you the following benefits:

- Large-diameter dial face $\varnothing = 78$ mm for easy reading
- 0,01 / 0,001 mm graduation

Features

Range:	80 mm
Range per rev.:	1 mm
Scale:	0-100 (0-100)
MPE any 1/10 revolution:	10 μm
MPE any 1/2 revolution:	14 μm
MPE any 1 revolution:	15 μm
MPE measuring range:	45 μm
H MPE (Hysteresis):	8 μm
R MPE (Repeatability):	3 μm
Mass:	314 g
Continuous dial:	Yes
Coaxial revolution counter:	Yes
Shockproof:	Yes
Jeweled bearing:	Yes
Digital/Analog:	Analog
Inch-Metric:	Metric
Graduation:	0.01 mm
Stem:	8 mm
Contact point:	Carbide tipped, thread: M 2.5 x 0.45 mm
Delivered:	with certificate of inspection, limit indicators

Dimensions

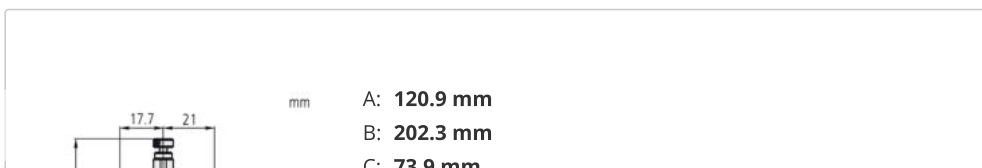



Accessories

Optional accessories:



Limit Hands (green) 2pcs
Dial Indicator Series 2/3/4
21AZB195
 Price on application

Spare parts

Consumable spares:



Contact Element Ball Point, M2,5x0,45
8,3mm Length, Metric
21AZA319



Contact Element Ball Point, M2,5x0,45
7,3mm Length, Carbide, Metric
901312