


TAPER GAGES




front

4833-2

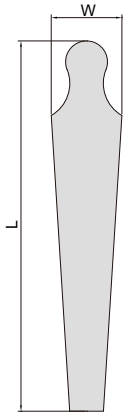


back

measure diameter of hole



When measuring diameter of holes, correction on reading is needed due to the thickness of taper gage. For example, when reading A is 14.96mm, diameter $\text{Ø}D$ is 15mm.

measure slot width



- Measure opening, slot width, hole diameter, etc.
- Diameter correction table on the back (only for 4833-1, 4833-2)
- Made of stainless steel

| Code | Range | Graduation | Accuracy | L | W |
|--------|----------|------------|---------------------|-----|------|
| 4833-1 | 0.8-15mm | 0.1mm | $\pm 0.05\text{mm}$ | 146 | 17 |
| 4833-2 | 15-30mm | 0.1mm | $\pm 0.05\text{mm}$ | 159 | 30.4 |
| 4833-3 | 30-45mm | 0.1mm | $\pm 0.05\text{mm}$ | 166 | 45.4 |
| 4833-4 | 45-60mm | 0.1mm | $\pm 0.05\text{mm}$ | 170 | 60.5 |

(mm)