


Waterproof Thermometer Model 39240

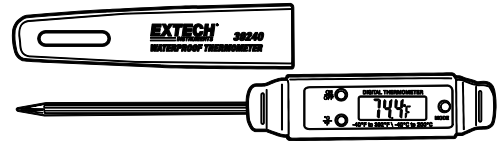

Operation

ON/OFF: Press to turn power on or off

C/F: Press to select the temperature units

MODE: Press once to hold the display. Auto OFF will be disabled and shown with an "X" on the display. Press and hold "MODE" for 3 seconds and the "X" will disappear. The instrument will return to normal operating mode. Press a second time to display the stored maximum reading. "MAX" will appear in the display. Press a third time to display the stored minimum reading. "MIN" will appear in the display. Press a fourth time to return to normal operation.

Reset: With "MAX" or "MIN" in the display, press and hold the MODE key until - - - appears. The memory selected is cleared. Press MODE to return to normal operation.

Battery Replacement

1. Use a flat blade screwdriver or a coin to open the rear battery compartment
2. Replace the button battery and replace the cover.

Other Battery Safety Reminders

- Never dispose of batteries in a fire. Batteries may explode or leak.
- Never mix battery types. Always install new batteries of same type.

Specifications

| | |
|------------|---|
| Range | -40 to 200°C / -40 to 392°F |
| Resolution | 0.1° |
| Accuracy | ±1°C / ± 2°F |
| Stem | 70mm / 2.75" stainless steel |
| Battery | LR44 button (or equivalent) |
| Weight | 29g / 0.7oz |
| Dimensions | 150x20x18mm / 5.9x0.8x0.7" |
| Dimensions | Display: 109 x 99 x 20mm (4,3 x 3,9 x 0,8") |

Copyright © 2021 Teledyne FLIR LLC

All rights reserved including the right of reproduction in whole or in part in any form
www.extech.com